


AC-620T

500grams/m²

TRANSPARENT FIREPROOF PVC

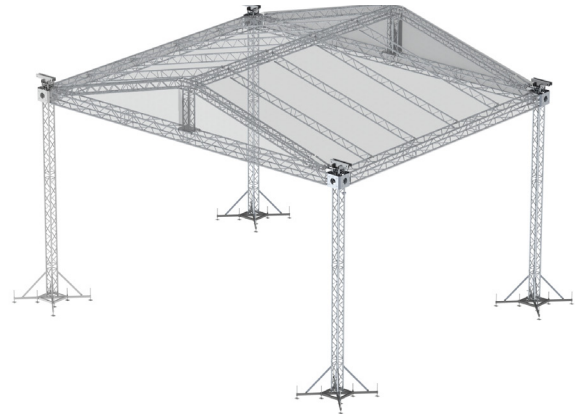

TECHNICAL SPECIFICATIONS

PROPERTIES	DATA	LEGAL STANDARD
Composition	PVC Flexible	
Thickness	500 microns $\pm$ 5% μ m	
Density	1,25 grs/cm ³	
Width	137 cm	
Weight in square meters	625 grs $\pm$ 5% gr/m ²	
Tensile Strength	Longitudinal 20MPa Transversal 21MPa	ASTM D882
Tear Running	Longitudinal 300% Transversal 345%	ASTM D882
UV Resistance	Blue Scale = 5 minimum	Weather meter machine
Longitudinal Shrinkage	-3% maximum (60°C)	
Temperature Range	-20°C +50°C	
Fireproof Regulation	M2 Spain Laboratory	UNE 23722 81

NON SILK-SCREEN PRINTABLE CRYSTAL, HIGH TRANSPARENCY AND UV RESISTANCE

FENIX Stage, S.L.U.

Avda. de los Trabajadores, 24 - Horno de Alcedo - 46026 - Valencia (España) - Tel: +34 96 125 08 55 - info@fenixstage.com / export@fenixstage.com