


AC-620T
500grams/m²
TRANSPARENT PVC

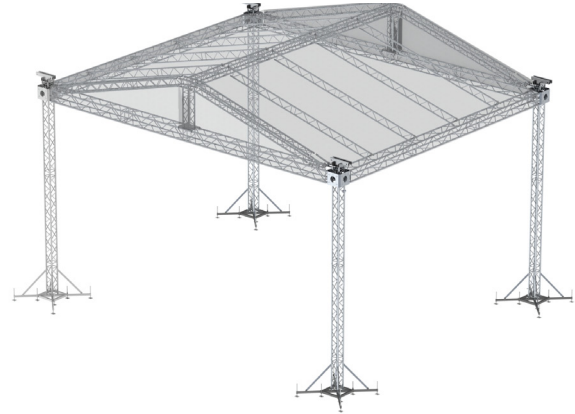

TECHNICAL SPECIFICATIONS

PROPIETIES	DATA	LEGAL STANDARD
Composition	PVC Flexible	
Thickness	500 microns \pm 5% μ m	
Density	1,25 grs/cm ³	
Width	137 cm	
Weight in square meters	625 grs \pm 5% gr/m ²	
Tensile Strength	Longitudinal 20MPa Transversal 21MPa	ASTM D882
Tear Running	Longitudinal 300% Transversal 345%	ASTM D882
UV Resistance	Blue Scale = 5 minimum	Weather meter machine
Longitudinal Shrinkage	-3% maximum (60°C)	
Temperature Range	-20°C +50°C	

NON SILK-SCREEN PRINTABLE CRYSTAL, HIGH TRANSPARENCY AND UV RESISTANCE